SONY

BRAVIA Professional Displays

2026 Lineup Brochure



Elevate Your Business with BRAVIA Professional Display. Introducing the New Lineup, Enhanced by Five Key Strengths.

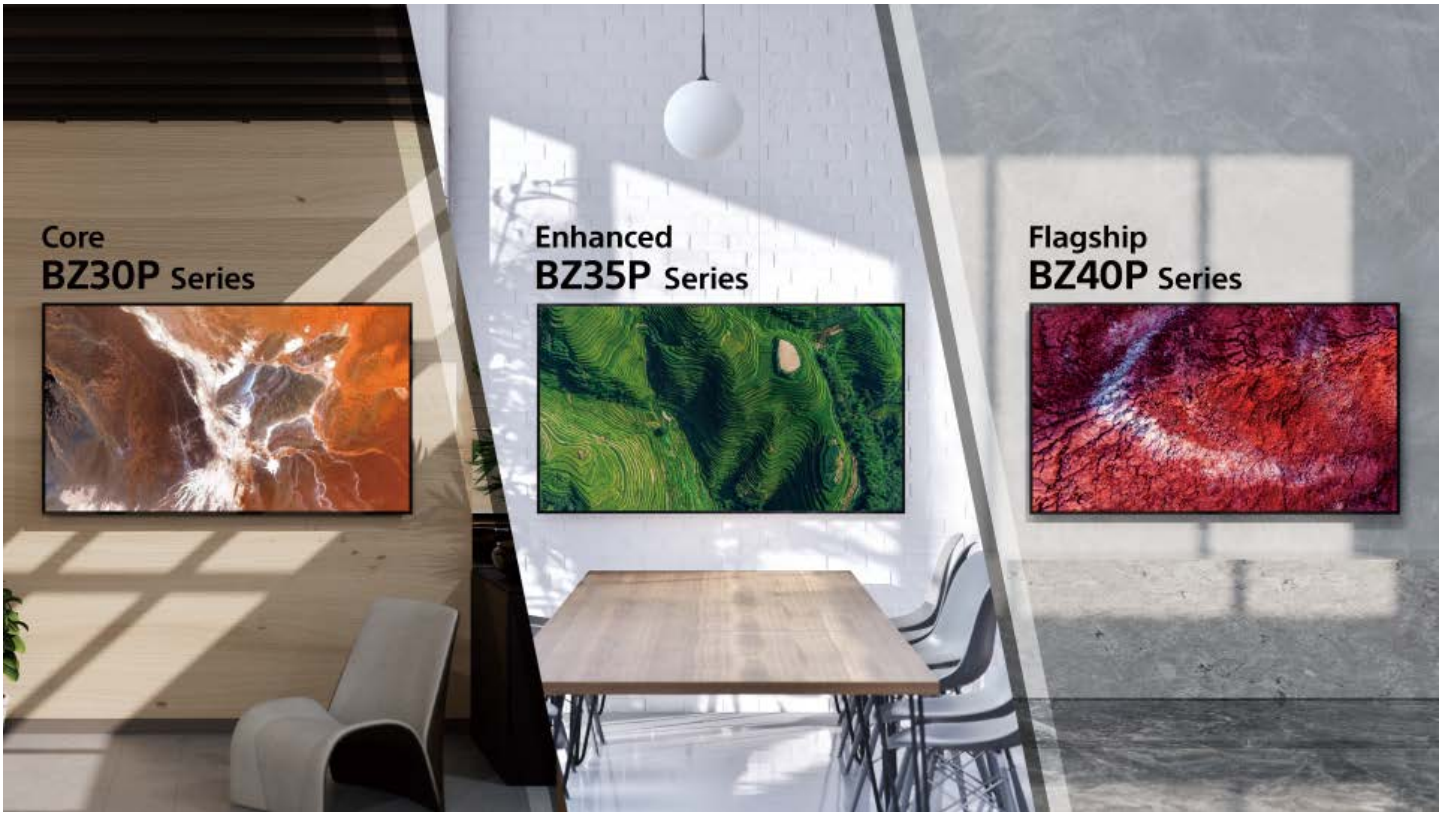

Picture Quality

Sony's unique technology delivers high-quality visuals that captivate audiences and improve clarity in communication and presentations.

Installation

With flexible installation and a low-reflection display, Sony delivers easy setup and reliable performance across a variety of environments.

Usability

Business-oriented custom settings and set-top box (STB)-free smart operation enhance efficiency across your workflow.

Reliability

Pro BRAVIA builds on decades of experience in creating displays for no-compromise professional applications.

Sustainability

An energy-efficient design* reduces daily operating costs, while advanced power-saving features support your sustainability goals.

*Available on BZ-P Series

Picture Quality

Advanced technology for compelling pictures that always stand out, even in bright environments

Sony's Pro BRAVIA lineup features advanced anti-reflection technologies tailored to each model. Exclusive to Pro BRAVIA BZ40P, Sony's Deep Black Non-Glare Premium combines anti-glare and enhanced contrast technologies to reduce on-screen reflections and boost contrast for superior visibility. The Pro BRAVIA BZ35P and BZ30P employs Sony's Deep Black Non-Glare Standard, which effectively suppresses reflections while maintaining high-contrast visual performance. Both models combine high brightness, wide color gamut, wide viewing angle*, and Sony's unique AI-powered image processing powered by the XR Processor to deliver consistently clear, bright images that captivate viewers.



* Viewing angle characteristics vary depending on model and screen size.

Deep Black Non-Glare

DBNG

Deep Black Non-Glare is Sony's proprietary technology that delivers high-contrast visuals while effectively minimizing glare—even in brightly lit environments such as meeting rooms and commercial spaces.
With the launch of the new BZ Series, the Deep Black Non-Glare now includes two options: Deep Black Non-Glare Premium and Deep Black Non-Glare Standard.

Deep Black Non-Glare Premium

Combines high-performance haze and low-reflection screen coating with advanced contrast processing powered by our XR Processor, glare is significantly minimized, resulting in deep, rich black expression.

DBNG Premium



Conventional display



Ultra-high haze and low-reflection coating dramatically minimizes glare and reduces reflections, enhancing deep black expression



XR Processor with AI Scene Recognition further enhances contrast, delivering even greater visibility

Deep Black Non-Glare Standard

Combines high-haze, glare-reducing coating with advanced contrast processing powered by the XR Processor, effectively suppressing reflections to deliver high-contrast visual performance.

DBNG Standard



Conventional display



High haze coating minimizes glare



XR Processor with AI Scene Recognition further enhances contrast, delivering even greater visibility

Every scene optimized by XR processor AI

Our powerful XR Processor is equipped with an AI scene recognition system that detects and analyzes content with unmatched accuracy and precision. Improved detection ensures all content is fine-tuned to deliver an even more immersive and memorable viewing experience. Key image aspects—color, contrast, resolution, focal points, depth, and motion—are optimized simultaneously to produce rich, striking visuals without unnatural tones or excessive enhancement. Additionally, low-resolution content is automatically upscaled to near-4K quality, free from unnatural artifacts*.

SONY XR

*Results may vary depending on contents and source quality.

Installation

Slim and elegant styling, designed for flexible installation

The Pro BRAVIA BZ-P Series features a slim, newly designed chassis and a unified aesthetic that seamlessly integrates into modern business and retail environments. With a consistent design concept across all Pro BRAVIA BZ40P, BZ35P, and BZ30P Series models, it's easy to combine displays of various sizes for beautifully harmonized results that meet diverse installation and budgetary requirements.

Previous BZ Series

New BZ Series





Slim new chassis design

With a maximum thickness of just 47mm*, the slim chassis design adds an elegant touch to any commercial space, including corporate boardrooms, lobbies, cafés, and retail stores.

* For models up to 65"

Thin, even bezels

Enhancing Pro BRAVIA's stylish, contemporary aesthetic, the display features a slim chassis complemented by narrow, evenly sized bezels on all sides. The elegant appearance is preserved even when the display is installed vertically for digital signage applications.

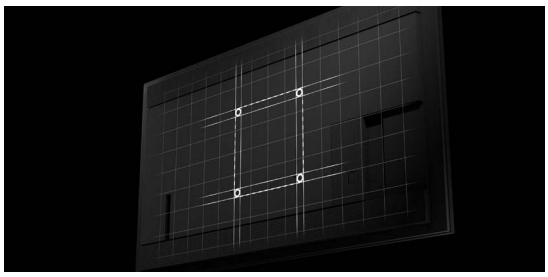



Centered bracket position

Installation flexibility is enhanced by the centrally positioned VESA hole pattern, making Pro BRAVIA P Series ideal for Pro BRAVIA BZ-P Series signage and other applications.

Inset handles for safe, secure grip

Recessed carry handles* help with easier, more confident handling during installation.

*75", 85" only



Ceiling tilt mount



Easel stand



Multiple displays



Casing stand

Flexible installation for diverse environments

In addition to landscape, portrait, and tilt installation, BRAVIA Pro Displays can be used with mobile stands for effective use of space, and ceiling mounted for digital signage.
Special installations such as easel stands, and multi-display installations are also possible.

Usability

Productivity-focused

Pro BRAVIA is packed with powerful functions and customization possibilities to make your daily work more productive, efficient and rewarding.



Streamlined setup, enhanced usability

For the new BZ-P Series, both the Home UI and the Initial Setup Wizard have been simplified and optimized for professional use. Pro Setting mode has been integrated into Pro Mode.

Signage made simple with no set-top box and seamless collaboration with leading CMS providers

Pro BRAVIA's powerful SoC (system on chip) platform enables smart digital signage operation without the need for an external set-top box (STB). With no extra hardware or unsightly cabling required, installation and operation are simplified while optimizing device reliability and security. The addition of a Real-Time Clock allows content management app schedules to be maintained even when the display power is switched off. Collaboration with major CMS solution providers facilitates compatibility testing, streamlining the implementation of preferred CMS solutions for customers.



Powerful customization that simplifies business operations

Settings can be fine-tuned for corporate or retail environments, enabling instant meeting starts with auto input detection. Tampering is prevented through managed controls, and optimized presets can be applied in one step for signage or meeting rooms.

Save time with cloud-based setup and management*

Native integration between the new BZ Series and Sony's powerful, intuitive remote monitoring solutions* give you control over cloud-based provisioning, control, monitoring, and maintenance.



Zero-touch provisioning*

Connect Pro BRAVIA to the cloud to allow automated setup, replacing manual provisioning for each display to dramatically reduce time and effort in large multi-screen deployments.



Remote monitoring and control*

Monitor and control the operation of Pro BRAVIA remotely. For digital signage applications, capture a screenshot of the current display to verify that content is playing correctly.



* Only available in EU/US/Japan.

Reliability

Engineered for reliability in demanding conditions

Tested to Sony's own demanding standards and meeting the IP5X standard* to resist dust, Pro BRAVIA builds on decades of experience in creating displays for no-compromise professional applications. Every element has been carefully optimized to ensure years of reliable operation in challenging environments, including a re-engineered dust resistant chassis.

*Available on BZ40P/ BZ35P Series only

Dust resistant chassis

The display's re-engineered chassis housing meets IP5X standard for resistance to dust without compromising operation in challenging environments.





Tested for longevity

A grueling testing program includes drop, vibration, temperature and humidity tests to ensure long-term reliability in real-world business environments.









Vibration, drop, and tip-over tests

By conducting various tests anticipating possible damage during product transportation (drops, vibration, fall-over, etc.), we confirm that our products do not sustain any damage to their performance, functionality, and exterior from transportation.*

Installation layout test

We conduct tests for ensuring that our products deliver stable operation in installation conditions imaginable for various operational arrangements, including vertical orientation and tilted setups. *

Environmental change durability test

We verify stable operation by exposing the product repeatedly to high and low temperature conditions, as well as high and low humidity conditions. Products are subject to various loads, including power cycling and changes in resolutions and frequencies of input signals, ensuring there are no abnormalities in performance, operability, and behavior.*

* All images are for illustrative purposes only.

Sustainability

Lower power consumption

An efficient new optical system and intelligent backlight control, in conjunction with the XR Processor's AI scene recognition, contribute to a power consumption reduction of up to 31% compared to previous models.

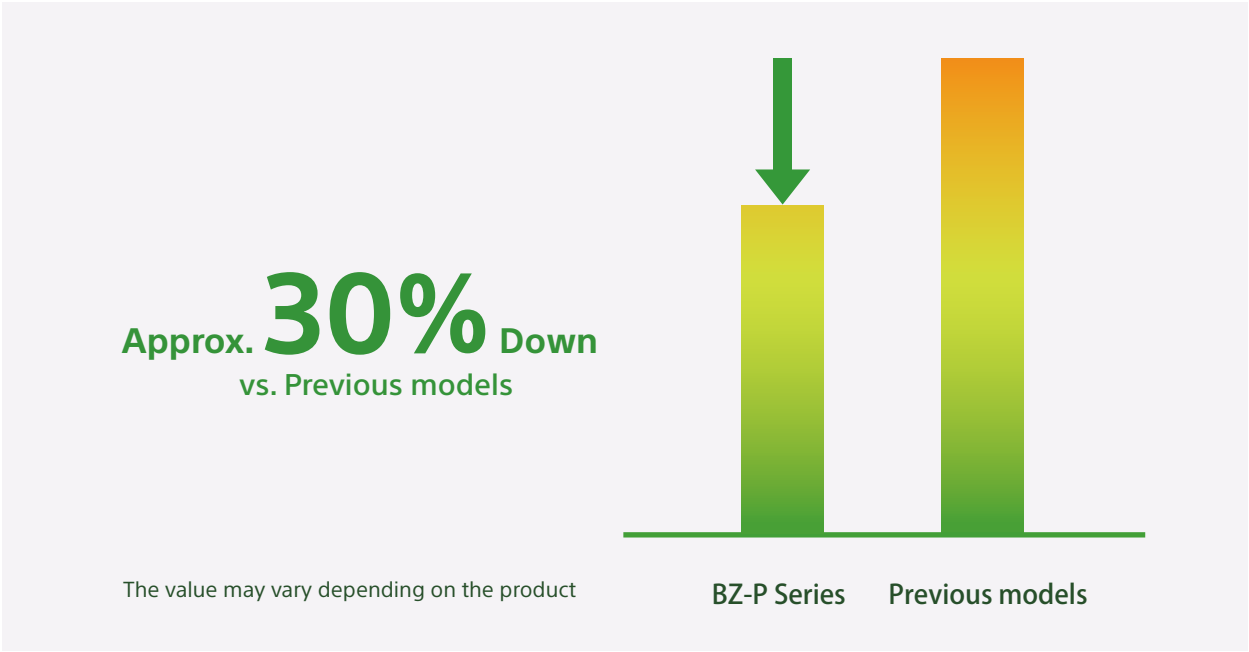

Environmentally conscious





Smart energy saving features

Power saving mode limits energy consumption, helping to reduce energy costs further during long-term operation in professional environments.

Increased recycled material usage

SORPLAS is Sony's groundbreaking plastic material made with used water bottles and waste optical discs. Compared to previous models, Pro BRAVIA P Series have increased usage of SORPLAS up to 43% of all plastic materials in the display.



Planet conscious packaging

The redesigned cardboard product packaging utilizes fewer raw materials, and the use of water-based printing ink further minimizes the environmental impact.

Certified for sustainability

All Pro BRAVIA P Series models are equipped with ENERGY STAR and EPEAT* certification (note: certifications may vary by region).

*Certification underway

BRAVIA Professional Displays		Flagship		Enhanced	Core			Essential
		BZ53L	BZ40P NEW	BZ35P NEW	BZ30P NEW	BZ30L	BZ30J	EZ20L
								
Screen Size		98″	85″ 75″ 65″ 55″	85″ 75″ 65″ 55″ 50″ 43″	85″ 75″ 65″ 55″ 50″ 43″	98″	32″	85″ 75″ 65″ 55″ 50″ 43″
Picture Quality	Brightness	780 cd/m²	700 cd/m²	500 cd/m²	400 cd/m²	440 cd/m²	300 cd/m²	350 cd/m²
	Display Resolution	4K (3840 x 2160 pixel)						
	Deep Black Non-Glare	DBNG Premium Deep Black Non-Glare Premium (Haze 47%*1)		DBNG Standard Deep Black Non-Glare Standard (Haze 25%)		- (Haze 2%)	- (Haze 25%)	- (Haze 1%*2)
	Picture Processor	XR Processor					HDR X1 Processor	X1 Processor
	Color Gamut (DCI-P3)	95%	92%			95%	92%	75%*3
	Viewing Angle (H/V)	178°/178° (CR >10)						
Installation Flexibility	Slim & Simplified Chassis	-	Yes*4			-		
	Even & Narrow Bezels	Yes*5				-		
	Centered VESA Holes	Yes				-		
	Handle	Yes*6				-		
	Portrait/Tilt	Yes*7						
Usability	Pro Mode	Yes						Yes (Simplified)
	Simplified UI	-	Yes			-		
	High-performance SoC	Yes						-
	Real-Time Clock	-	Yes			-		
	On-board Storage	32GB					16GB	
	RMS	Sony Device Management Platform (DMP)*8 Crestron XiO Cloud® and Q-SYS						-
	CMS	Compatibility testing is conducted in collaboration with major CMS solution providers						-
	Google Play	Yes	-			Yes		
	Chromecast / Apple AirPlay	Yes / Yes	- / Yes			Yes / Yes		
	BRAVIA Signage Free	Yes						
Reliability	Operation Time	24/7						16/7
	IP5X	-	Yes		-			
Eco	Low Power Consumption	-	Yes			-		
	Certification	-	ENERGY STAR and EPEAT*9			ENERGY STAR	-	
	Usage of SORPLAS	Yes	Yes (Usage rate: Up to 43%)			Yes	-	

*1 : 85″ Haze 52%

*2 : EZ20L 85" model is 2%; EZ20L 50″ model is 3%.

*3 : The 85″ model is 92%.

*4 : The 75″ is 72mm, 85″ is 73mm thin: all other sizes are 47mm thin.

*5 : The bezel width is 15 mm for the BZ53L and for the 85" models of the BZ40P/BZ35P/BZ30P series; 13 mm for the 75" models of the BZ40P/BZ35P/BZ30P series; and 11.3 mm for all other models.

*6 : For the BZ53L 98″ and the 85″ and 75″ models of the BZ40P/BZ35P/BZ30P Series only

*7 : There are precautions for portrait and tilted installations; please see the manual for details.

*8 : Sony Device Management Platform (DMP) is available only in the US.

*9 : Certification underway

Flagship
BZ53L

98”

780cd/m²

Unparalleled picture quality in the largest, brightest flagship 4K professional display, featuring unique DBNG Premium.





Deep Black Non-Glare Premium

SONY XR

4K HDR

Awesome picture quality, brightness and contrast in our largest screen size

The extraordinary presence of our biggest, brightest Professional BRAVIA demands every audience’s attention. Blending cutting-edge technology with installation-friendly features, 98” Pro BRAVIA BZ53L adds Sony’s unique Deep Black Non-Glare Premium for even more dynamic visuals that always stand out. With spectacular 780 cd/m² brightness, cinematic color and a huge viewing angle plus capacious 32 GB memory to store more apps and content, it’s the 4K HDR professional display that’s bigger in every way.

Deep Black Non-Glare Premium

DBNG Premium

Combining a high-performance haze and low-reflection screen coating with advanced contrast processing powered by our powerful XR Processor. Glare is dramatically minimized, complemented by deep, rich black expression.



Conventional display



Deep Black Non-Glare Premium

780 cd/m²/ XR Processor

Brighter is better. In busy retail showrooms or corporate lobbies, 98” BRAVIA shines with an extraordinary 780 cd/m² screen brightness that can’t be missed, even in light-flooded spaces. Full Array Local Dimming boosts peak brightness further still to an eye-popping 1500 cd/m².



Installation friendly (handle/weight/size)

Safer carrying

Ergonomically positioned lower horizontal handles are easy to grab, making lifting easier and more comfortable.



Easier access

Reduced carton size eases transportation. The ability to carry Pro BRAVIA vertically (portrait style) gives easier access in elevators and stairways.

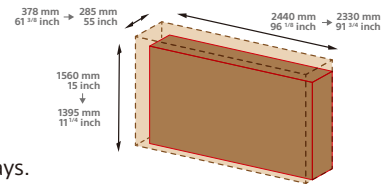

Flagship

BZ40P

85” 75” 65” 55”

700cd/m²

Unparalleled picture quality in the exceptionally bright flagship 4K professional display, featuring unique DBNG Premium.





Deep Black Non-Glare Premium

SONY XR

4K HDR

Deep Black Non-Glare Premium

DBNG Premium

Combining a high-performance haze and low-reflection screen coating with advanced contrast processing powered by our powerful XR Processor. Glare is dramatically minimized, complemented by deep, rich black expression.



Conventional display



Ultra-High Haze and Low-Reflection Coating dramatically minimizes glare and reduces reflections for deep black expression



XR Processor with AI Scene Recognition further enhances contrast, delivering even greater visibility

Slim, dust-resistant (IP5X-rated) design with flexible installation

The Pro BRAVIA BZ40P Series features a slim 47mm* chassis with narrow bezels for a clean, modern look. Its IP5X-rated housing ensures dust resistance, while the centrally positioned VESA pattern offers flexible horizontal or vertical installation for signage and other applications.

*For models up to 65”



Lower power consumption

Thanks to an efficient new optical system and intelligent backlight control that works with the XR Processor’s AI scene recognition, power consumption is reduced by up to 31% compared to previous models.

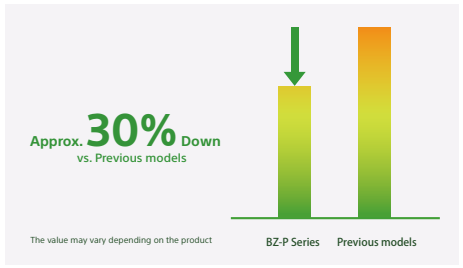

Enhanced BZ35P

85” 75” 65”
55” 50” 43”

500cd/m²

4K professional display with unique DBNG Standard enhanced with IP5X rating and brightness for optimal viewing in various environments.

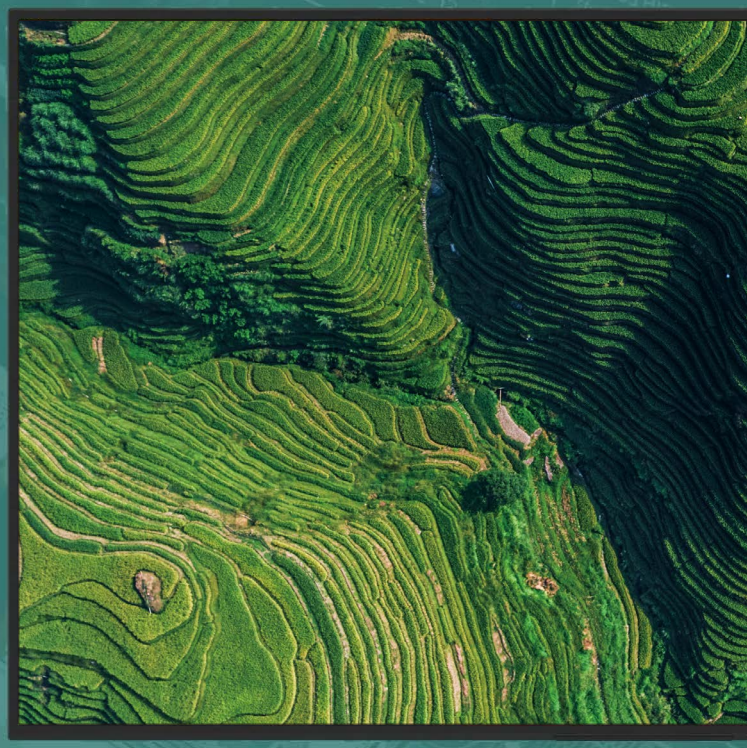



Deep Black Non-Glare Standard

SONY XR

4K HDR

Deep Black Non-Glare Standard

DBNG Standard

Combines a high-haze, glare-reducing coating with advanced contrast processing powered by the XR Processor. Reflections are suppressed to deliver high-contrast visual performance.



Conventional display



High Haze Coating minimizes glare



XR Processor with AI Scene Recognition further enhances contrast, delivering even greater visibility

Slim, dust-resistant (IP5X-rated) design with flexible installation

The Pro BRAVIA BZ35P Series features a slim 47mm* chassis with narrow bezels for a clean, modern look. Its IP5X-rated housing ensures dust resistance, while the centrally positioned VESA pattern offers flexible horizontal or vertical installation for signage and other applications.

*For models up to 65”



Lower power consumption

Thanks to an efficient new optical system and intelligent backlight control that works with the XR Processor’s AI scene recognition, power consumption is reduced by up to 31% compared to previous models.

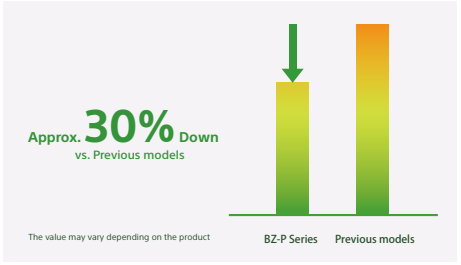

Core

BZ30P

85" 75" 65"
55" 50" 43"

*32"is BZ30J model

400cd/m²

Designed for 24/7 operation and portrait/tilt installation, this core 4K professional display is equipped with unique DBNG Standard and pro mode.





Deep Black Non-Glare Standard

SONY XR

4K HDR

Deep Black Non-Glare Standard

DBNG Standard

Combines a high-haze, glare-reducing coating with advanced contrast processing powered by the XR Processor. Reflections are suppressed to deliver high-contrast visual performance.



Conventional display



High Haze Coating minimizes glare



XR Processor with AI Scene Recognition further enhances contrast, delivering even greater visibility



Slim design with flexible installation

The Pro BRAVIA BZ30P Series features a slim 47mm* chassis with narrow bezels for a clean, modern look. A centrally positioned VESA pattern offers flexible horizontal or vertical installation for signage and other applications.*For models up to 65"

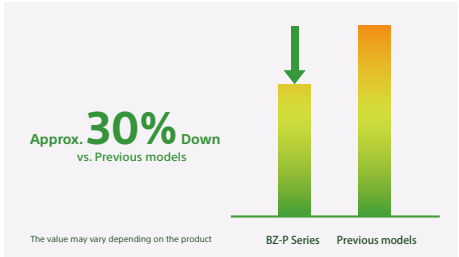

Lower power consumption

Thanks to an efficient new optical system and intelligent backlight control that works with the XR Processor's AI scene recognition, power consumption is reduced by up to 31% compared to previous models.

Core

BZ30L/J

98”

32”

98BZ30L 440cd/m² • 32BZ30J 300cd/m²

Designed for 24/7 operation and portrait/tilt installation, this core 4K professional display is equipped with pro mode.





4K HDR

98BZ30L

SONY XR

32BZ30J

SONY X1

Big screen presence, compact versatility

Choose the expansive FW-98BZ30L for impactful large-scale viewing or the compact 32BZ30J for smaller spaces—both delivering consistent 4K picture quality, brightness, and contrast, with professional reliability and flexible installation for any environment.





Latest Sony picture technologies to impress every audience

The 98" model has additional technologies for enhanced performance. Our flagship XR™ Processor delivers exquisite clarity and image reproduction. Full Array LED with local dimming brings captivating contrast while intelligently controlling the backlight for efficient power consumption. XR Triluminos PRO promises truly vibrant colors to engage end users in any scenario.



*98BZ30L only

Styled to blend with every environment

The Sony logo is discreetly positioned on the edge of the display’s beautifully slim bezel – with nothing distracting your audience from immersive images.
Install Pro BRAVIA in portrait or landscape orientation to suit any corporate or retail space. The display can also be tilted at an angle for even greater flexibility.

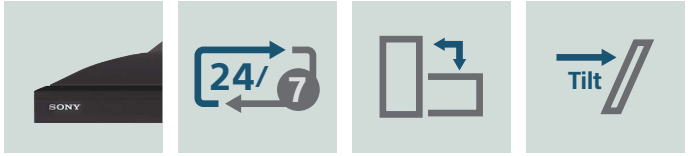

Essential
EZ20L

85" 75" 65"
55" 50" 43"

350cd/m²

Rated for 16/7 operation, this 4K professional display offers essential functionality and user-friendly features.

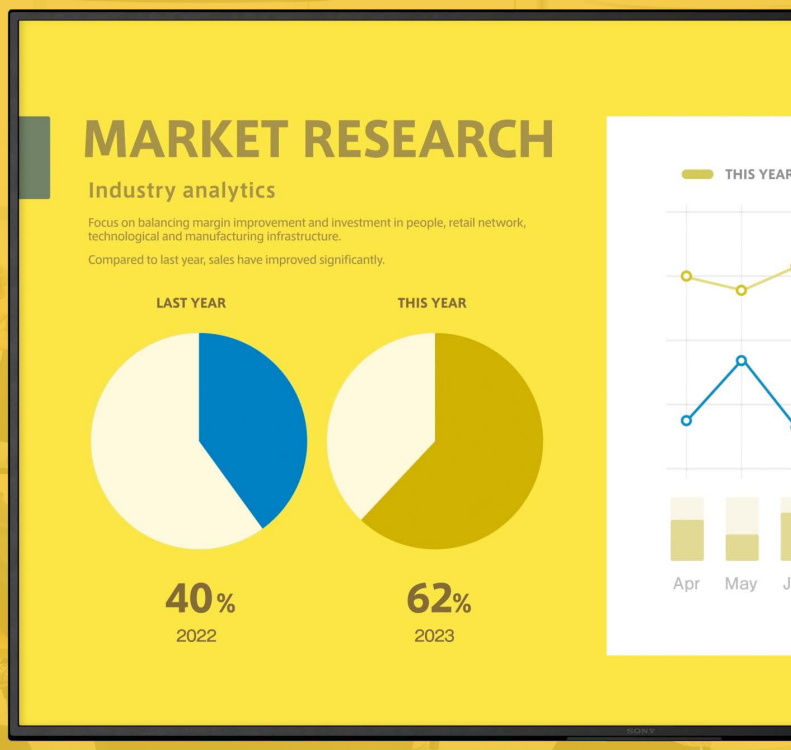



4K HDR

SONY X1 4K Processor

Wide viewing angle

The extra wide viewing angle of our BRAVIA Pro displays ensures that everyone in the room can enjoy clear, bright images wherever they're positioned. Advertising content and promotional messages are seen clearly by customers, wherever they are standing.

*Viewing angle characteristics vary depending on model and screen size.



Images are simulated.

IP control / RS-232C

The EZ20L Series is controllable both via an IP network and RS-232C. This controllability makes it possible to incorporate the displays into a variety of existing systems such as in offices, classroom, hospital, and as eye-catching signage.

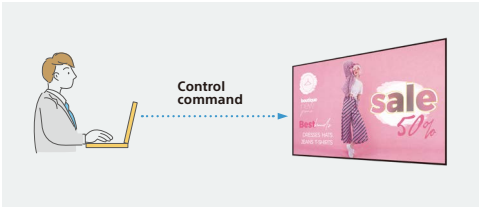

"BRAVIA Signage Free" quick signage app

Our no-cost BRAVIA Signage Free software is now a pre-installed app on EZ20L Series Professional Displays, allowing you to create polished multimedia content with no special skills or extra downloading needed.



Landscape, portrait, tilt supported

Install BRAVIA Pro display in portrait or landscape orientation to suit any corporate or retail space. The display can also be tilted at an angle for even greater flexibility.

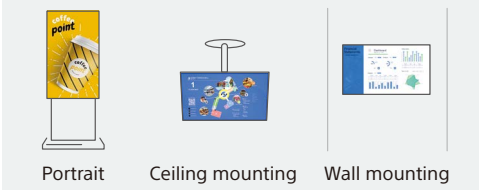

Dimensions

Unit : cm

Flagship

BZ53L

FW-98BZ53L



BZ40P

FW-85BZ40P



FW-75BZ40P



FW-65BZ40P



FW-55BZ40P



Enhanced

BZ35P

FW-85BZ35P



FW-75BZ35P



FW-65BZ35P



FW-55BZ35P



FW-50BZ35P



FW-43BZ35P



Core

BZ30L

FW-98BZ30L



BZ30P

FW-85BZ30P



FW-75BZ30P



FW-65BZ30P



FW-55BZ30P



FW-50BZ30P



FW-43BZ30P



Essential

EZ20L

FW-85EZ20L



FW-75EZ20L



FW-65EZ20L



FW-55EZ20L



FW-50EZ20L



FW-43EZ20L



Core

BZ30J

FW-32BZ30J



BZ53L/BZ40P Series Specifications

Flagship					
Series	BZ53L	BZ40P			
Model	FW-98BZ53L	FW-85BZ40P	FW-75BZ40P	FW-65BZ40P	FW-55BZ40P
Screen Size	98″	85″	75″	65″	55″
Brightness (cd/m2)	780	700			
Display Resolution (HxV, pixels)	3,840 x 2,160				
Deep Black Non-Glare	Deep Black Non-Glare Premium				
Haze	47%	52%	47%		
Picture Processor	XR Processor				
Color Gamut (DCI-P3)	95%	92%			
Viewing Angle (H/V)	178°/178° (CR >10)				
Panel Type	VA	IPS			
Backlight Type	Direct (Full Array LED)	Direct LED		Edge LED	
Response Time (Gray to gray, Typical, ms)	6.5	8			
Video/Audio Input	HDMI x4 (HDCP2.3), Composite Video Input x1, Analog Audio Input x1	HDMI x4 (HDCP2.3)			
Video/Audio Output	Digital Audio Output x1	-			
Headphone Out	YES (x1)				
Terminals for Control	USB x2, RJ45 (Ethernet) x1, RS-232C x1	USB x2, RJ45 (Ethernet) x1, RS-232C x1			
Wi-Fi	YES				
Bluetooth	YES				
Operating System	Android TV	Android			
Real-Time Clock	-	YES			
Internal Memory	32GB*1				
Control Protocols	IP Control, RS232C Control, HDMI-CEC				
HDMI Signal	4096x2160p(24,60Hz), 3840x2160p(24,30,60,120Hz), 1080p(24,30,60,120Hz), 1080i(60Hz), 720p(24,30,60Hz), 480p	4096x2160p(24,50,60Hz), 3840x2160p(24,25,30,50,60Hz), 1080p(24,30,50,60Hz), 1080i(50,60Hz), 720p(24,30,50,60Hz), 576p, 480p			
USB Playback Codecs	MPEG1:MPEG1 / MPEG2PS:MPEG2 / MPEG2TS (HDV,AVCHD):MPEG2,AVC / MP4 (XAVCS):AVC,MPEG4,HEVC / AVI:Xvid,MotionJpeg / ASF (WMV):VC1 / MOV:AVC,MPEG4,MotionJpeg / MKV:Xvid,AVC,MPEG4,VP8.HEVC / WEBM:VP8 / 3GPP:MPEG4,AVC / MP3 / ASF (WMA) / LPCM / WAV / MP4AAC / FLAC / JPEG	MPEG1:MPEG1 / MPEG2PS:MPEG2 / MPEG2TS(HDV,AVCHD):MPEG2,AVC / MP4(XAVC S):AVC,MPEG4,HEVC / AVI,MotionJpeg / MOV:AVC,MPEG4,MotionJpeg / MKV,AVC,MPEG4,VP8.HEVC / WEBM:VP8 / 3GPP:MPEG4,AVC / MP3 / ASF(WMA) / LPCM / WAV / MP4AAC / FLAC / JPEG			
Speaker	10W+10W+10W+10W	20W			
Operation Temperature	-	0°C - 40°C (32°F - 104°F)			
Storage Temperature	-	-20°C - 60°C			
Power Requirement	AC 110-240V, 50/60Hz				
Power Consumption (Rated)	505W	299W	258W	172W	138W
Power Consumption (in Standby)	0.5W				
IP Rating (Dust Resistant)	-	IP5X			
Operation Time	24 / 7				
Orientation	Landscape/Portrait				
Tilt	Yes*2				
EMC*3	Class-B				
Environmental Certification	-	ENERGY STAR and EPEAT*4			
VESA® Hole Pitch (W x H)	600 x 400 mm / 23 5/8 x 15 3/4 inch	400 x 400 mm / 15 3/4 x 15 3/4 inch	300 x 300 mm / 11 7/8 x 11 7/8 inch		
Set Dimensions (W x H x D) (Without Stand)	2199 x 1255 x 85 mm / 86 5/8 x 49 1/2 x 3 3/8 inch	1910 x 1091 x 73 mm / 75 1/4 x 43 x 2 7/8 inch	1684 x 962 x 72 mm / 66 3/8 x 37 7/8 x 2 7/8 inch	1459 x 834 x 47 mm / 57 1/2 x 32 7/8 x 1 7/8 inch	1240 x 711 x 47 mm / 48 7/8 x 28 x 1 7/8 inch
Set Weight (Without Stand)	67.2 kg / 148.1 lb.	41.5 kg / 91.5 lb.	29.2 kg / 64.4 lb.	23.4 kg / 51.6 lb.	17.6 kg / 38.8 lb.
Package Dimensions (W x H x D)	2330 x 1394 x 283 mm / 91 3/4 x 55 x 11 1/4 inch	2043 x 1238 x 236 mm / 80 1/2 x 48 3/4 x 9 3/8 inch	1810 x 1114 x 187 mm / 71 3/8 x 43 7/8 x 7 3/8 inch	1591 x 968 x 161 mm / 62 3/4 x 38 1/8 x 6 3/8 inch	1355 x 841 x 141 mm / 53 3/8 x 33 1/8 x 5 5/8 inch
Package Weight	91 kg / 200.5 lb.	59 kg / 130 lb.	42 kg / 92.6 lb.	30 kg / 66.1 lb.	23 kg / 50.7 lb.

*1 Includes storage used by the operating system.
*2 Please refer to the manual for allowable installation angles.
*3 Applicable EMC standards and regulatory requirements vary by country or region.
*4 Certification is underway.
* All dimensions and weights are approximate.

BZ35P Series Specifications

Enhanced						
Series	BZ35P					
Model	FW-85BZ35P	FW-75BZ35P	FW-65BZ35P	FW-55BZ35P	FW-50BZ35P	FW-43BZ35P
Screen Size	85″	75″	65″	55″	50″	43″
Brightness (cd/m²)	500					
Display Resolution (HxV, pixels)	3,840 x 2,160					
Deep Black Non-Glare	Deep Black Non-Glare Standard					
Haze	25%					
Picture Processor	XR Processor					
Color Gamut (DCI-P3)	92%					
Viewing Angle (H/V)	178°/178° (CR >10)					
Panel Type	VA	IPS			VA	IPS
Backlight Type	Direct LED		Edge LED			
Response Time (Gray to gray, Typical, ms)	8				6	8
Video/Audio Input	HDMI x4 (HDCP2.3)					
Video/Audio Output	-					
Headphone Out	YES (x1)					
Terminals for Control	USB x2, RJ45 (Ethernet) x1, RS-232C x1					
Wi-Fi	YES					
Bluetooth	YES					
Operating System	Android					
Real-Time Clock	YES					
Internal Memory	32GB*1					
Control Protocols	IP Control, RS232C Control, HDMI-CEC					
HDMI Signal	4096x2160p(24,50,60Hz), 3840x2160p(24,25,30,50,60Hz), 1080p(24,30,50,60Hz), 1080i(50,60Hz), 720p(24,30,50,60Hz), 576p, 480p					
USB Playback Codecs	MPEG1:MPEG1 / MPEG2PS:MPEG2 / MPEG2TS(HDV,AVCHD):MPEG2,AVC / MP4(XAVC S):AVC,MPEG4,HEVC / AVI,MotionJpeg / MOV:AVC,MPEG4,MotionJpeg / MKV,AVC,MPEG4,VP8.HEVC / WEBM:VP8 / 3GPP:MPEG4,AVC / MP3 / ASF(WMA) / LPCM / WAV / MP4AAC / FLAC / JPEG					
Speaker	20W					
Operation Temperature	0°C - 40°C (32°F-104°F)					
Storage Temperature	-20°C - 60°C					
Power Requirement	AC 110V-240V, 50/60Hz					
Power Consumption (Rated)	252W	191W	136W	110W	97W	94W
Power Consumption (in Standby)	0.5W					
IP Rating (Dust Resistant)	IP5X					
Operation Time	24 / 7					
Orientation	Landscape/Portrait					
Tilt	Yes*2					
EMC*3	Class-B					
Environmental Certification	ENERGY STAR and EPEAT*4					
VESA® Hole Pitch (W x H)	400 x 400 mm / 15 3/4 x 15 3/4 inch	300 x 300 mm / 11 7/8 x 11 7/8 inch			200 x 200 mm / 7 7/8 x 7 7/8 inch	
Set Dimensions (W x H x D)	1910 x 1091 x 73 mm / 75 1/4 x 43 x 2 7/8 inch	1684 x 962 x 72 mm / 66 3/8 x 37 7/8 x 2 7/8 inch	1459 x 834 x 47 mm / 57 1/2 x 32 7/8 x 1 7/8 inch	1240 x 711 x 47 mm / 48 7/8 x 28 x 1 7/8 inch	1126 x 647 x 47 mm / 44 3/8 x 25 1/2 x 1 7/8 inch	972 x 560 x 47 mm / 38 3/8 x 22 1/8 x 1 7/8 inch
Set Weight	41.5 kg / 91.5 lb.	29.2 kg / 64.4 lb.	23 kg / 50.7 lb.	17.3 kg / 38.2 lb.	11.5 kg / 25.4 lb.	8.9 kg / 19.7 lb.
Package Dimensions (W x H x D)	2043 x 1238 x 236 mm / 80 1/2 x 48 3/4 x 9 3/8 inch	1810 x 1114 x 187 mm / 71 3/8 x 43 7/8 x 7 3/8 inch	1591 x 968 x 161 mm / 62 3/4 x 38 1/8 x 6 3/8 inch	1355 x 841 x 141 mm / 53 3/8 x 33 1/8 x 5 5/8 inch	1226 x 770 x 131 mm / 48 3/8 x 30 3/8 x 5 1/4 inch	1068 x 676 x 130 mm / 42 1/8 x 26 5/8 x 5 1/8 inch
Package Weight	59 kg / 130 lb.	42 kg / 92.6 lb.	30 kg / 66.1 lb.	23 kg / 50.7 lb.	16 kg / 35.3 lb.	12 kg / 26.5 lb.

*1 Includes storage used by the operating system.
*2 Please refer to the manual for allowable installation angles.
*3 Applicable EMC standards and regulatory requirements vary by country or region.
*4 Certification is underway.
* All dimensions and weights are approximate.

BZ30P/L/J Series Specifications

Core								
Series	BZ30P						BZ30L	BZ30J
Model	FW-85BZ30P	FW-75BZ30P	FW-65BZ30P	FW-55BZ30P	FW-50BZ30P	FW-43BZ30P	FW-98BZ30L	FW-32BZ30J
Screen Size	85″	75″	65″	55″	50″	43″	98″	32″
Brightness (cd/m²)	400						440	300
Display Resolution (HxV, pixels)	3,840 x 2,160						3,840 x 2,160	
Deep Black Non-Glare	Deep Black Non-Glare Standard						-	
Haze	25%						2%	25%
Picture Processor	XR Processor						XR Processor	4K HDR Processor X1
Color Gamut (DCI-P3)	92%						95%	92%
Viewing Angle (H/V)	178°/178° (CR >10)							
Panel Type	VA	IPS			VA	IPS	VA	
Backlight Type	Direct LED		Edge LED				Direct (Full Array LED)	Edge LED
Response Time (Gray to gray, Typical, ms)	8				6	8	6.5	10
Video/Audio Input	HDMI x4 (HDCP2.3)						HDMI x4 (HDCP2.3), Composite Video Input x1, Analog Audio Input x1	
Video/Audio Output	-						Digital Audio Output x1	
Headphone Out	YES (x1)							
Terminals for Control	USB x2, RJ45 (Ethernet) x1, RS-232C x1						USB x2, RJ45 (Ethernet) x1, RS-232C x1	
Wi-Fi	YES							
Bluetooth	YES							
Operating System	Android						Android TV	
Real-Time Clock	YES						-	
Internal Memory	32GB*1							16GB*1
Control Protocols	IP Control, RS232C Control, HDMI-CEC							
HDMI Signal	4096x2160p(24,50,60Hz), 3840x2160p(24,25,30,50,60Hz), 1080p(24,30,50,60Hz), 1080i(50,60Hz), 720p(24,30,50,60Hz), 576p, 480p						4096x2160p(24,60Hz), 3840x2160p(24,30,60,120Hz), 1080p(24,30,60,120Hz), 1080i(60Hz), 720p(24,30,60Hz), 480p	4096x2160p(24,60Hz), 3840x2160p(24,30,60Hz), 1080p(24,30,60Hz), 1080i(60Hz), 720p(24,30,60Hz), 480p
USB Playback Codecs	MPEG1:MPEG1 / MPEG2PS:MPEG2 / MPEG2TS (HDV,AVCHD):MPEG2,AVC / MP4 (XAVC S):AVC,MPEG4,HEVC / AVI,MotionJpeg / MOV:AVC,MPEG4,MotionJpeg / MKV,AVC,MPEG4,VP8.HEVC / WEBM:VP8 / 3GPP:MPEG4,AVC / MP3 / ASF(WMA) / LPCM / WAV / MP4AAC / FLAC / JPEG						MPEG1:MPEG1 / MPEG2PS:MPEG2 / MPEG2TS (HDV,AVCHD):MPEG2, AVC / MP4(XAVCS):AVC, MPEG4,HEVC / AVI:Xvid,MotionJpeg/ ASF (WMV):VC1 / MOV:AVC, MPEG4,MotionJpeg / MKV:Xvid, AVC, MPEG4,VP8.HEVC / WEBM:VP8 / 3GPP:MPEG4, AVC / MP3 / ASF(WMA) / LPCM / WAV / MP4AAC / FLAC / JPEG	
Speaker	20W						10W+10W+10W+10W	5W+5W
Operation Temperature	0°C - 40°C (32°F - 104°F)							
Storage Temperature	-20°C - 60°C						-	
Power Requirement	AC 110V-240V, 50/60Hz							
Power Consumption (Rated)	255 W	204 W	148 W	123 W	115 W	84 W	328W	66W
Power Consumption (in Standby)	0.5W							
IP Rating (Dust Resistant)	-							
Operation Time	24 / 7							
Orientation	Landscape/Portrait							
Tilt	Yes*2							
EMC*3	Class-B							
Environmental Certification	ENERGY STAR and EPEAT*4						ENERGY STAR	-
VESA® Hole Pitch (W x H)	400 x 400 mm / 15 3/4 x 15 3/4 inch	300 x 300 mm / 11 7/8 x 11 7/8 inch			200 x 200 mm / 7 7/8 x 7 7/8 inch		600 x 400 mm / 23 5/8 x 15 3/4 inch	100 x 200 mm 3 7/8 x 7 7/8 inch
Set Dimensions (W x H x D)	1910 x 1091 x 73 mm / 75 1/4 x 43 x 2 7/8 inch	1684 x 962 x 72 mm / 66 3/8 x 37 7/8 x 2 7/8 inch	1459 x 834 x 47 mm / 57 1/2 x 32 7/8 x 1 7/8 inch	1240 x 711 x 47 mm / 48 7/8 x 28 x 1 7/8 inch	1126 x 647 x 47 mm / 44 3/8 x 25 1/2 x 1 7/8 inch	972 x 560 x 47 mm / 38 3/8 x 22 1/8 x 1 7/8 inch	2199 x 1255 x 85 mm / 86 5/8 x 49 1/2 x 3 3/8 inch	726 × 430 × 76 mm
Set Weight	41.5 kg / 91.5 lb.	29.2 kg / 64.4 lb.	23 kg / 50.7 lb.	17.3 kg / 38.2 lb.	11.5 kg / 25.4 lb.	8.9 kg / 19.7 lb.	67.2 kg / 148.1 lb.	7.5 kg
Package Dimensions (W x H x D)	2043 x 1238 x 236 mm / 80 1/2 x 48 3/4 x 9 3/8 inch	1810 x 1114 x 187 mm / 71 3/8 x 43 7/8 x 7 3/8 inch	1591 x 968 x 161 mm / 62 3/4 x 38 1/8 x 6 3/8 inch	1355 x 841 x 141 mm / 53 3/8 x 33 1/8 x 5 5/8 inch	1226 x 770 x 131 mm / 48 3/8 x 30 3/8 x 5 1/4 inch	1068 x 676 x 130 mm / 42 1/8 x 26 5/8 x 5 1/8 inch	2330 x 1394 x 283 mm / 91 3/4 x 55 x 11 1/4 inch	814 x 551 x 152 mm
Package Weight	59 kg / 130 lb.	42 kg / 92.6 lb.	30 kg / 66.1 lb.	23 kg / 50.7 lb.	16 kg / 35.3 lb.	12 kg / 26.5 lb.	91 kg / 200.5 lb.	11 kg

*1 Includes storage used by the operating system.
*2 Please refer to the manual for allowable installation angles.
*3 Applicable EMC standards and regulatory requirements vary by country or region.
*4 Certification is underway.
* All dimensions and weights are approximate.

EZ20L Series Specifications

Essential						
Series	EZ20L					
Model	FW-85EZ20L	FW-75EZ20L	FW-65EZ20L	FW-55EZ20L	FW-50EZ20L	FW-43EZ20L
Screen Size	85″	75″	65″	55″	50″	43″
Brightness (cd/m²)	350					
Display Resolution (HxV, pixels)	3,840 x 2,160					
Deep Black Non-Glare	-					
Haze	2%	1%			3%	1%
Picture Processor	X1 Processor					
Color Gamut (DCI-P3)	92%	75%				
Viewing Angle (H/V)	178°/178° (CR >10)					
Panel Type	VA	IPS			VA	IPS
Backlight Type	Direct LED					
Response Time (Gray to gray, Typical, ms)	8				6	8
Video/Audio Input	HDMI x3 (HDCP2.3), Composite Video Input x1, Analog Audio Input x1					
Video/Audio Output	Digital Audio Output x1					
Headphone Out	YES (x1)					
Terminals for Control	USB x2, RJ45 (Ethernet) x1, RS-232C x1					
Wi-Fi	YES					
Bluetooth	YES					
Operating System	Android TV					
Real-Time Clock	-					
Internal Memory	16GB*1					
Control Protocols	IP Control, RS232C Control, HDMI-CEC					
HDMI Signal	4096 x 2160p (24, 50, 60 Hz), 3840 x 2160p (24, 25, 30, 50, 60 Hz), 1080p (30, 50, 60 Hz), 1080/24p, 1080i (50, 60 Hz), 720p (30, 50, 60 Hz), 720/24p, 576p, 576i 480p, 480i					
USB Playback Codecs	MPEG1:MPEG1/MPEG2 PS:MPEG2/MPEG2 TS(HDV,AVCHD):MPEG2,AVC/MP4(XAVC S):AVC,MPEG4,HEVC,AV1/AVI:MotionJpeg/ASF(WMV):VC1/ MOV:AVC,MPEG4/MKV:AVC,MPEG4,VP8,HEVC/3GPP:MPEG4,AVC/MP3/ASF(WMA)/LPCM/WAV/MP4AAC/FLAC/JPEG					
Speaker	10W+10W					
Operation Temperature	-					
Storage Temperature	-					
Power Requirement	AC 110V-240V, 50/60Hz					
Power Consumption (Rated)	342W	315W	226W	191W	146W	125W
Power Consumption (in Standby)	0.5W					
IP Rating (Dust Resistant)	-					
Operation Time	16 / 7					
Orientation	Landscape/Portrait					
Tilt	Yes*2					
EMC*3	Class-B					
Environmental Certification	-					
VESA® Hole Pitch (W x H)	400 x 400 mm / 15 3/4 x 15 3/4 inch	300 x 300 mm / 11 7/8 x 11 7/8 inch			200 x 200 mm / 7 7/8 x 7 7/8 inch	
Set Dimensions (W x H x D) (Without Stand)	1901 x 1090 x 73 mm / 74 7/8 x 43 x 2 7/8 inch	1686 x 969 x 72 mm / 66 1/2 x 38 1/4 x 2 7/8 inch	1462 x 842 x 71 mm / 57 5/8 x 33 1/4 x 2 7/8 inch	1243 x 721 x 71 mm / 49 x 28 1/2 x 2 7/8 inch	1126 x 653 x 70 mm / 44 3/8 x 25 3/4 x 2 7/8 inch	972 x 567 x 70 mm / 38 3/8 x 22 3/8 x 2 7/8 inch
Set Weight (Without Stand)	44.7 kg / 98.5 lb.	30.4 kg / 67 lb.	20.4 kg / 45 lb.	15.3 kg / 33.8 lb.	12.1 kg / 26.7 lb.	9.3 kg / 20.5 lb.
Package Dimensions (W x H x D)	2035 x 1238 x 237 mm / 80 1/4 x 48 3/4 x 9 3/8 inch	1824 x 1114 x 187 mm / 71 7/8 x 43 7/8 x 7 3/8 inch	1588 x 965 x 184 mm / 62 5/8 x 38 x 7 1/4 inch	1362 x 840 x 160 mm / 53 5/8 x 33 1/8 x 6 3/8 inch	1240 x 782 x 141 mm / 48 7/8 x 30 7/8 x 5 5/8 inch	1070 x 695 x 141 mm / 42 1/4 x 27 3/8 x 5 5/8 inch
Package Weight	57 kg / 125.6 lb.	45 kg / 99.2 lb.	28 kg / 61.7 lb.	21 kg / 46.3 lb.	16 kg / 35.3 lb.	12 kg / 26.5 lb.

*1 Includes storage used by the operating system.
*2 Please refer to the manual for allowable installation angles.
*3 Applicable EMC standards and regulatory requirements vary by country or region.
* All dimensions and weights are approximate.

Connection Terminals

BZ53L*



BZ40P* / BZ35P* / BZ30P*



98BZ30L*



BZ30J*



EZ20L*



①USB Ports ② Digital Audio Out ③ Audio Output/Headphone Jack ④ Video Input (Video/Audio)
⑤ HDMI Inputs ⑥ LAN ⑦ Control Port ⑧ HDMI Audio Input ⑨ S-Center Speaker Input

*Terminals and labels may vary depending on region/country/LCD Display model.



Sony Global AV Solutions Program

Empowering Integrators and Global Enterprise Customers Worldwide with Coordinated Product Offering, Pricing, Service and Support.

https://pro.sony/ue_US/products/pro-displays

AV Solutions Alliance Partners



Discover how we work closely with top companies to add even more value to our industry-leading AV products and solutions. Our BRAVIA Professional Displays support a growing ecosystem of compatible technologies from established and emerging solution providers.

Whether it's configuring a digital signage network, connecting participants using video collaboration, or outfitting a room for device management and automation, we are committed to helping you.

Visit : pro.sony/Alliances

© 2026 Sony Corporation. All rights reserved. Reproduction in whole or in part without permission is prohibited. Features and specifications are subject to change without notice. All non-metric weights and measurements are approximate. 'Sony' and 'BRAVIA' are registered trademarks or trademarks of Sony Corporation. All other trademarks are the property of their respective owners.

Apple and AirPlay are trademarks of Apple Inc., registered in the U.S. and other countries and regions.
To use Apple AirPlay with this TV or Display, the latest version of iOS, iPadOS, or macOS is recommended.

Google Play, Android, Android TV and Chromecast built-in are trademarks of Google LLC.

Crestron® and Crestron XiO Cloud® are trademarks of Crestron Electronics, Inc

For full features visit : pro.sony/BRAVIA

SONY