

## DS-55



A 55" dual-sided display featuring 23.4mm slim profile and flexible display orientation, designed specifically for professional digital signage applications in diverse indoor surroundings.

---

Featuring Full HD resolution, 700 nits of brightness and a 3000:1 contrast ratio, the DS-55 is capable of delivering crisp images in diverse indoor environments. Dual HDMI connections make it easy for IPC or media player integration and allow displaying individual contents on each screen. With the metal housing and flexible display orientation, the DS-55 is ideal for retail, points of sale, and advertising markets in public environments.

---


- > 55" dual-sided LCD display
- > 23.4mm slim profile
- > FHD 1920 x 1080 resolution
- > MVA panel for wide viewing angle
- > 700 nits of brightness and 3000:1 contrast ratio fulfill diverse indoor applications
- > Dual HDMI connections for connecting media players/ IPCs easily
- > Separately driven display contents on each screen
- > Remote control for controlling display and changing OSD setting easily
- > Flexible display orientation: portrait/ landscape
- > Light weight and mounting holes on display sides for easy installation
- > Durable metal casing

# DS-55


## Specifications

## DS-55

<b>Panel</b>	Panel Type	LED-Backlit TFT LCD (MVA Panel)
	Panel Size	55.0"
	Max. Resolution	FHD 1920 x 1080
	Pixel Pitch (H x W)	0.63 x 0.63 mm
	Brightness	700/700 nits
	Contrast Ratio	3000:1
	Viewing Angle	178°/178°
	Viewable Size (H x V)	1209.6 x 680.4 mm
	Display Colour	10.7B
	Response Time (GTG)	6.5 ms
	Colour Gamut	72 (%)
Surface Treatment	Haze 11%, 3H	
<b>Input</b>	HDMI	HDMI x 2 (With HDCP)
<b>Power</b>	Power Supply	AC 110~240 V, 50/60 Hz
	Power Consumption	230 W
	Light source	LED
<b>Operating Conditions</b>	Temperature	0°C~40°C (32°F~104°F)
	Humidity	20%~80% (No condensation)
<b>Storage Conditions</b>	Temperature	-10°C~50°C (14°F~122°F)
	Humidity	20%~80% (No condensation)
<b>Dimensions</b>	Display (H x W x D)	1516.0 x 858.0 x 23.4 mm (59.7" x 33.8" x 0.9")
	Bezel (U/D/L/R)	64.0/239.0/87.0/87.0 mm (2.5"/9.4"/3.4"/3.4")
	Power Box (H x W x D)	406.0 x 254.0 x 55.0 mm (15.9" x 10.0" x 2.2")
	Packing (W x H x D)	1618.0 x 970.0 x 249.0 mm (63.7" x 38.2" x 9.8")
<b>Weight</b>	Display	45.5 kg (100.3 lb)
	Power Box	4.0 kg (8.8 lb)
	Gross	56.5 kg (124.6 lb)
<b>Regulation Approval</b>	Certifications & Compliance	CB, CE, FCC, RoHS, WEEE, REACH
<b>Accessories</b>	Supplied	Power Cable 110~240V x1 Power Box x1 (with 24V&12V line) Remote Controller x1 (Battery CR 2025 3V)
	Optional	IPC



Durable metal casing with 23.4mm slim profile

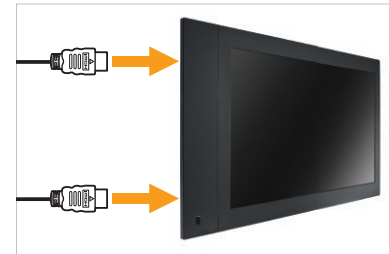

Dual HDMI connectors for easily connect to media players or IPCs



Flexible orientation: portrait/ landscape



Independent power box