

INTERFACE MODULE FOR FCB-EX980 SONY CAMERA

FCBI FCBI - M

FCBI module was designed for connection of FCB- EX980 camera.



FCBI module is equipped of standard 9-pin D-sub Cannon connector.

The module is possible to fix on the rear panel of FCB-EX980 cameras.

FCBI module is possible to use with other of FCB series cameras

(f. e. FCB – EX20DP,FCB- EX 1000P, FCB – EX1010P etc.)

Pin assignment of FCBI module

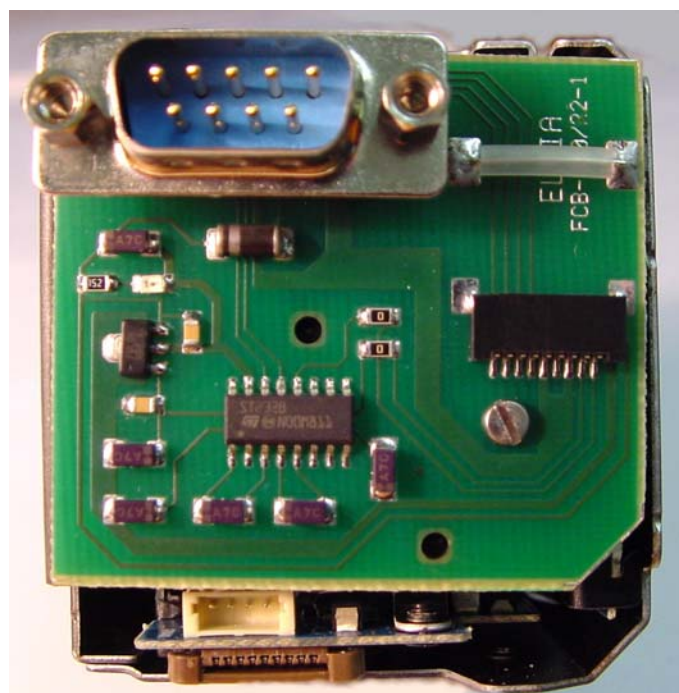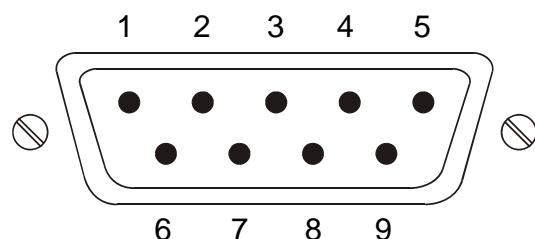

Pin No. (Cannon 9-pin ♂)	Name	Level
1	TXD camera	Camera data output RS232
2	RXD camera	Camera data input RS232
3	GND (for TXD & RXD)	
4	DC IN	9,8 V \pm 3 V
5	GND (for DC IN)	
6	VBS OUT	1,0 V \pm 0,2 V
7	GND (for VBS OUT)	
8	V LOCK PULSE	External VD-lock Pulse (EX.FV: Negative, 3 Vp-p 50 % duty)
9	GND (VL PULSE)	

FCBI module has operating temperature 0 \div 40°C.

FCBI-M module has operating temperature -20 \div 70°C (only on request).